

S 45 Top Automatic car tyre changer









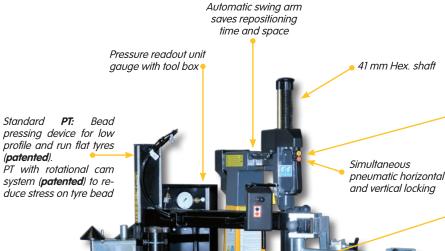

Standard CRU Quick exchange device for tool heads



Rim capacity

12 - 24" Outside clamping range (Alloy rims)


ter filter and lubricator with built-in safety valve (CE norms)


Pressure regulator-wa-

cylinders and double control plate (patented) to ensure perfect rim centering

Self-centering four- jaws chuck with two clamping

Powerful moto-inverter rotation of turntable 7 - 17 rpm





Front extractable pedal assembly

breaker cylinder of stainless steel

Double acting bead



Three-way adjustable blade angle and enlarged wheel pad Bead breaking range Pos. 1 45-390 mm (1,75-15,5") Pos. 2 10-340 mm (0,25-13,5")




Inside clamping range (Steel rims)






S 45 TOP

No bolt down installation required









Code 0-11464016 Description

S 45 TOP

Electrical supply

230V - 1Ph - 50/60Hz Two speed moto-inverter